

WrapidSeal™

Manhole Encapsulation System

Canusa-CPS is a leading manufacturer of specialty pipeline coatings which, for over 30 years, have been used for sealing and corrosion protection of pipeline joints and other substrates. Canusa high performance products are manufactured to the highest quality standards and are available in a number of configurations to accommodate your specific project applications.

Product Description


WrapidSeal™ is a wrap around heat shrinkable sheet that has been specifically designed for protection of buried and exposed manhole structures. WrapidSeal™ is supplied in bulk rolls of varying widths and consists of a crosslinked polyolefin backing, coated with a protective heat activated adhesive. A separate closure is used to create a complete sleeve with the adhesive effectively bonding to the substrate, providing corrosion protection and adhesion for the impermeable backing.

Features & Benefits


- Heat activated, high shrink membrane
Torch applied, shrinks to fit profile.
- High tensile & elongation
Accommodates movement
- Excellent abrasion resistance
Tough product, resists soil stress
- Bulk roll
Fits any size manhole
- Complete coverage
Reduces ground water infiltration.
- Provides corrosion protection
Extends service life.

Long Term Protection

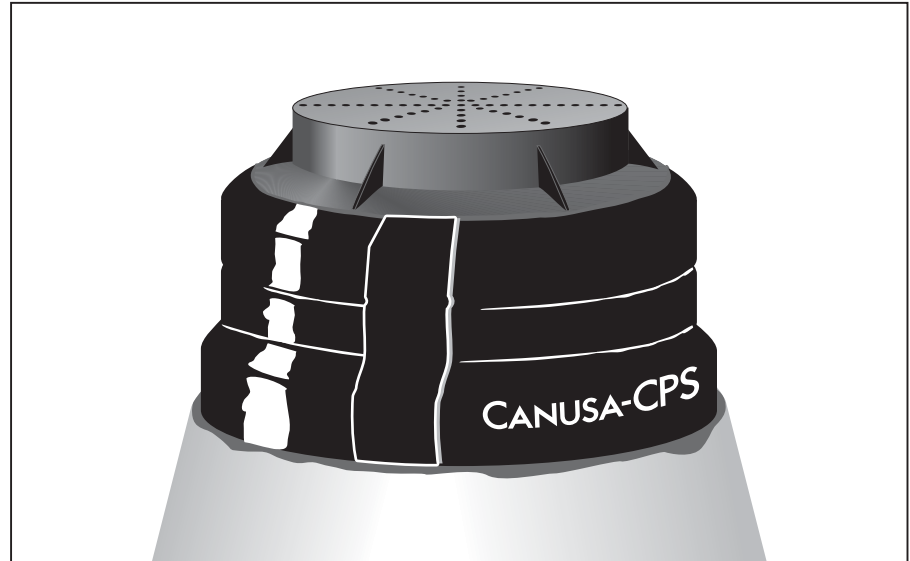



Once installed, the system creates a barrier to water infiltration and effectively protects the manhole support structure and frame from ground moisture, preventing corrosion and freeze-thaw damage. In below grade vaults or concrete lines, WrapidSeal™ is used to minimize water infiltration, reducing dewatering costs and loads on waste water treatment facilities.



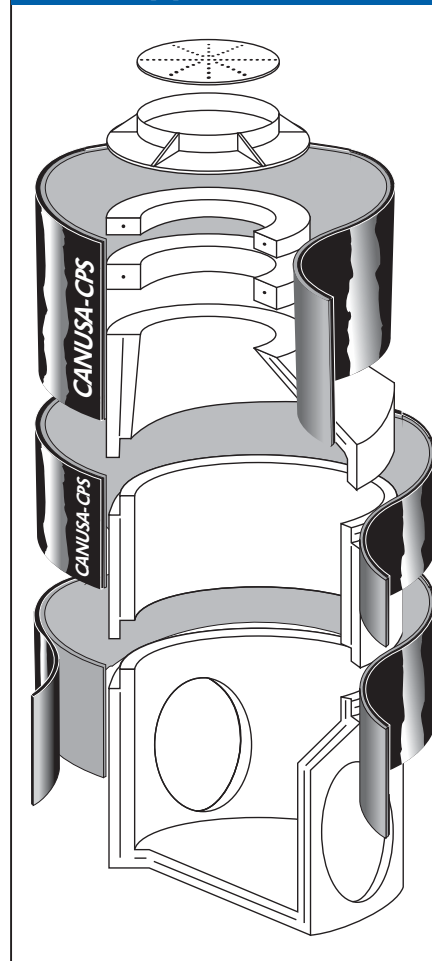

Applications



Applications

-  Manhole Encapsulation
-  Water Pipelines
-  Repair & Rehab
-  Step-Down Joints

Configurations


-  High Shrink
-  Multi-Sleeve Kit

Pipe Sizes

-  300-1500+ (12-60''+)

Material Requirements

Size the sleeve such that it wraps around the perimeter of the manhole base plus 150mm (6") overlap. See the table below for length of WrapidSeal™ required.

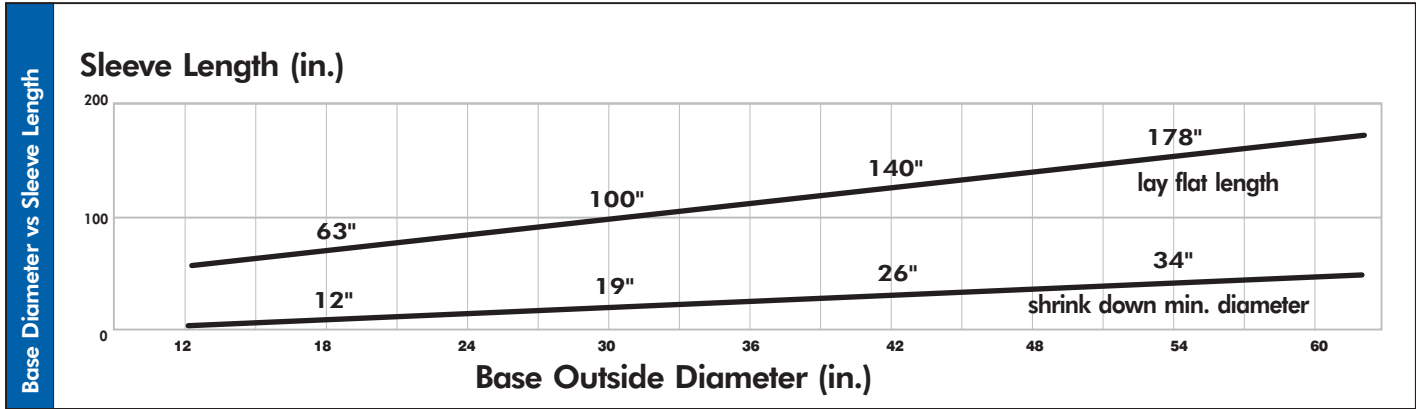

Typical Product Properties

	Test Standard	Unit	Results
Adhesive	Softening Point	ASTM E28	°C (°F)
	Lap Shear Strength	DIN 30 672	N/cm ² (psi)
Backing	Tensile Strength	ASTM D638	MPa (psi)
	Elongation	ASTM D638	%
	Hardness	ASTM D2240	Shore D
	Abrasion Resistance	ASTM D1044	mg
Sleeve	Peel Strength	ASTM D1000	N/cm (pli)
	Water Absorption	ASTM D570	%
	Low Temp. Flexibility	ASTM D2671D	°C (°F)

Ordering Information & Product Dimensions

WrapidSeal™ is supplied in 12" or 18" widths in 50' long bulk rolls. Closure seals and primer are ordered separately.

Specify the width of WrapidSeal™ required and the number or length and size of closure seals.

Distribution

Master Distributor in the United States:
CCI Pipeline Services
 Houston, Texas
 www.WrapidSeal.com
 e-mail: sales@wrapidseal.com
 tel: (281) 350-2100

Applications

Below or Above Grade	<ul style="list-style-type: none"> Prevents Water Infiltration Accommodates Ground Movement Protects Against Degradation 	<p>Cast Iron Frame & Cover</p> <p>Grade Rings</p> <p>Cone Section</p>
	<ul style="list-style-type: none"> Prevents Water Infiltration Resists Soil Stress 	<p>Pre-Cast Riser</p> <p>Pre-Cast Base</p> <p>Sewer Line</p>



A SHAWCOR COMPANY

Canada

CANUSA-CPS
 a division of SHAWCOR LTD.
 25 Bethridge Road
 Rexdale, Ontario
 M9W 1M7,
 Canada
 Tel: +1 (416) 743-7111
 Fax: +1 (416) 743-5927

U.S.A./Latin America

CANUSA-CPS
 a division of SHAWCOR INC.
 2408 Timberloch Place
 Building C-8
 The Woodlands, Texas
 77380, U.S.A.
 Tel: +1 (281) 367-8866
 Fax: +1 (281) 367-4304

Europe/Middle East

CANUSA-CPS
 a division of Canusa Systems Ltd.
 Unit 3, Sterling Park
 Gatwick Road
 Crawley, West Sussex
 England RH10 9QT
 Tel: +44 (1293) 541254
 Fax: +44 (1293) 541777

Asia/Pacific

CANUSA-CPS
 a division of SHAWCOR LTD.
 #05-31, Blk 52, Frontier
 Ubi Avenue 3
 Singapore
 408867
 Tel: +65-6749-8918
 Fax: +65-6749-8919